

NNH4-65D-R6-V2



12-Port Next Generation PerforMax™ sector antenna, 4x 698-896 and 8x 1695-2360 MHz, 65° HPBW, 6x RET.

- Antenna optimized for higher gain with superior radiation efficiency
- Superior patterns for enhanced interference mitigation resulting in improved SINR, higher throughput, and more capacity
- Interleaved dipole technology results into an attractive, low wind load mechanical package
- Best in class PIM immunity
- Powered by Andrew's SEED® technology (Sustainable Energy Efficient Design)

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (4)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W

NNH4-65D-R6-V2


Protocol

3GPP/AISG 2.0

Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2688 mm 105.827 in
Net Weight, without mounting kit	46 kg 101.413 lb

Array Layout

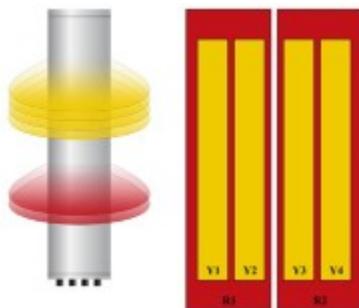

Array ID	Frequency (MHz)	RF Connector	RET (WIRET)	AISG No.	RET UID
X1	698-896	1 - 2	1	AISG1	CPooooooooooooMM.1
X2	898-896	3 - 4	2	AISG1	CPooooooooooooMM.2
Y1	1695-2360	5 - 6	3	AISG1	CPooooooooooooMM.3
Y2	1695-2360	7 - 8	4	AISG1	CPooooooooooooMM.4
Y3	1695-2360	9 - 10	5	AISG1	CPooooooooooooMM.5
Y4	1695-2360	11 - 12	6	AISG1	CPooooooooooooMM.6

(Scales of cultural losses are not true depictions of array sizes)

Port Configuration



Electrical Specifications

NNH4-65D-R6-V2

Impedance	50 ohm
Operating Frequency Band	1695 – 2360 MHz 698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	1,440 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	Y1,Y2,Y3,Y4	Y1,Y2,Y3,Y4	Y1,Y2,Y3,Y4	Y1,Y2,Y3,Y4
Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2180	2300–2360
RF Port	1-4	1-4	5-12	5-12	5-12	5-12
Gain, dBi	16.8	17	18	18.6	19.1	19.4
Beamwidth, Horizontal, degrees	74	72	71	66	62	57
Beamwidth, Vertical, degrees	8.4	7.4	5.7	5.3	5	4.6
Beam Tilt, degrees	0–10	0–10	0–10	0–10	0–10	0–10
USLS (First Lobe), dB	17	15	16	17	18	16
Front-to-Back Ratio at 180°, dB	31	32	32	35	36	35
CPR at Boresight, dB	24	24	21	21	21	20
Isolation, Cross Polarization, dB	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300	250	250	250	200

Mechanical Specifications

Wind Loading @ Velocity, frontal	970.0 N @ 150 km/h (218.1 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	304.0 N @ 150 km/h (68.3 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,162.0 N @ 150 km/h (261.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	667.0 N @ 150 km/h (149.9 lbf @ 150 km/h)
Wind Speed, maximum	241.4 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in

NNH4-65D-R6-V2

Length, packed 2875 mm | 113.189 in

Weight, gross 62 kg | 136.686 lb

Regulatory Compliance/Certifications

Agency	Classification
---------------	-----------------------

UK-ROHS	Compliant
---------	-----------


Included Products

BSAMNT-3F	- Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.
-----------	--

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

BSAMNT-3F

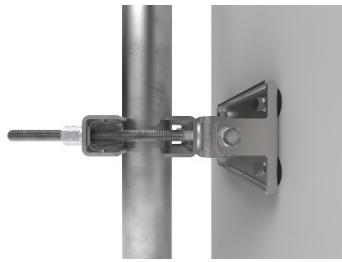

Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.

Product Classification

Product Type	Fixed tilt mounting kit
---------------------	-------------------------

General Specifications

Application	Outdoor
--------------------	---------

Color	Silver
--------------	--------

Dimensions

Compatible Diameter, maximum	115 mm 4.528 in
-------------------------------------	-------------------

Compatible Diameter, minimum	60 mm 2.362 in
-------------------------------------	------------------

Weight, net	5.6 kg 12.346 lb
--------------------	--------------------

Material Specifications

Material Type	Galvanized steel
----------------------	------------------

Packaging and Weights

Included	Brackets Hardware
-----------------	---------------------

Packaging quantity	1
---------------------------	---

Weight, gross	5.8 kg 12.787 lb
----------------------	--------------------

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

BSAMNT-3F

