

# RR2VV-6533B-R6



12-port sector/multibeam antenna, 4x 698–960 MHz 65° HPBW and 8x 1710–2690 MHz 4x 33°HPBW, 6x RET with tilt indicators

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector
- Enhances network capacity through six sectors on high band while maintaining low band coverage layer through three sectors with only three antenna faces

## General Specifications

Antenna Type	Multibeam
Band	Multiband
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Copper   Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

## Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male
RET Interface, quantity	2 female   2 male
Input Voltage	10–30 Vdc
Internal RET	High band (4)   Low band (2)
Power Consumption, idle state, maximum	1 W
Power Consumption, normal conditions, maximum	8 W
Protocol	3GPP/AISG 2.0 (Single RET)

# RR2VV-6533B-R6

## Dimensions

Width	498 mm   19.606 in
Depth	197 mm   7.756 in
Length	2100 mm   82.677 in
Net Weight, without mounting kit	43 kg   94.799 lb

## Array Layout

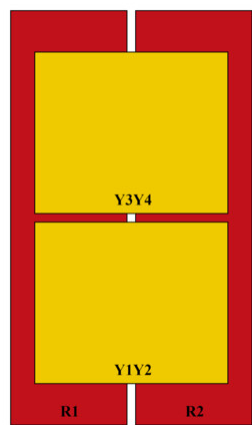

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	698-960	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxR1
R2	698-960	3 - 4	65°	2	AISG1	CPxxxxxxxxxxxxR2
Y1	1710-2690	5 - 6	33°	3	AISG1	CPxxxxxxxxxxxxY1
Y2	1710-2690	7 - 8	33°	4	AISG1	CPxxxxxxxxxxxxY2
Y3	1710-2690	9 - 10	33°	5	AISG1	CPxxxxxxxxxxxxY3
Y4	1710-2690	11 - 12	33°	6	AISG1	CPxxxxxxxxxxxxY4

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration



# RR2VV-6533B-R6

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1710 – 2690 MHz   698 – 960 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	1,000 W

## Electrical Specifications

<b>Frequency Band, MHz</b>	<b>698–803</b>	<b>824–880</b>	<b>880–960</b>	<b>1710–1880</b>	<b>1920–2170</b>	<b>2300–2490</b>	<b>2490–2690</b>
<b>Gain, dBi</b>	15.1	15.4	15.5	17.4	18.9	19	19.5
<b>Beam Centers, Horizontal, degrees</b>				±27	±25	±24	±22
<b>Beamwidth, Horizontal, degrees</b>	70	64	61	32	29	27	24
<b>Beamwidth, Vertical, degrees</b>	10.9	9.7	9.1	8.9	7.9	6.8	6.4
<b>Beam Tilt, degrees</b>	2–12	2–12	2–12	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	18	18	18	18	20	19	19
<b>Front-to-Back Ratio at 180°, dB</b>	30	30	34	34	36	34	33
<b>Front-to-Back Ratio, Copolarization 180° ± 30°, dB</b>	29	28	29	29	31	30	30
<b>Isolation, Cross Polarization, dB</b>	25	25	25	25	25	25	25
<b>Isolation, Inter-band, dB</b>	25	25	25	25	25	25	25
<b>VSWR   Return loss, dB</b>	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-150	-150	-150	-150	-150	-150	-150
<b>Input Power per Port at 50°C, maximum, watts</b>	400	400	400	250	250	250	250

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	803.0 N @ 150 km/h (180.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	275.0 N @ 150 km/h (61.8 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	1,040.0 N @ 150 km/h (233.8 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	661.0 N @ 150 km/h (148.6 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241.4 km/h (150 mph)

## Packaging and Weights

# RR2VV-6533B-R6

Width, packed	565 mm   22.244 in
Depth, packed	309 mm   12.165 in
Length, packed	2287 mm   90.039 in
Weight, gross	57.4 kg   126.545 lb

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---

# BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.5 kg | 14.33 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

