


# UDX1726T-N10 | E11F03P86



Ultra-Compact Twin Diplexer PCS-AWS/BRS, DC/AISG on PCS-AWS, NEX10 Connectors

- Ideal for small cell applications
- dc/AISG pass-through on low frequency ports
- Industry leading PIM performance
- Miniature NEX10™ series connector for superior PIM and compact size

## Product Classification

**Product Type** Diplexer

## General Specifications

**Color** Gray

**Common Port Label** Common

**Modularity** 2-Twin

**RF Connector Interface** NEX10 Female

**RF Connector Interface Body Style** Long neck

## Dimensions


**Height** 65 mm | 2.559 in

**Width** 140 mm | 5.512 in

**Depth** 35 mm | 1.378 in

## Outline Drawing

# UDX1726T-N10 | E11F03P86

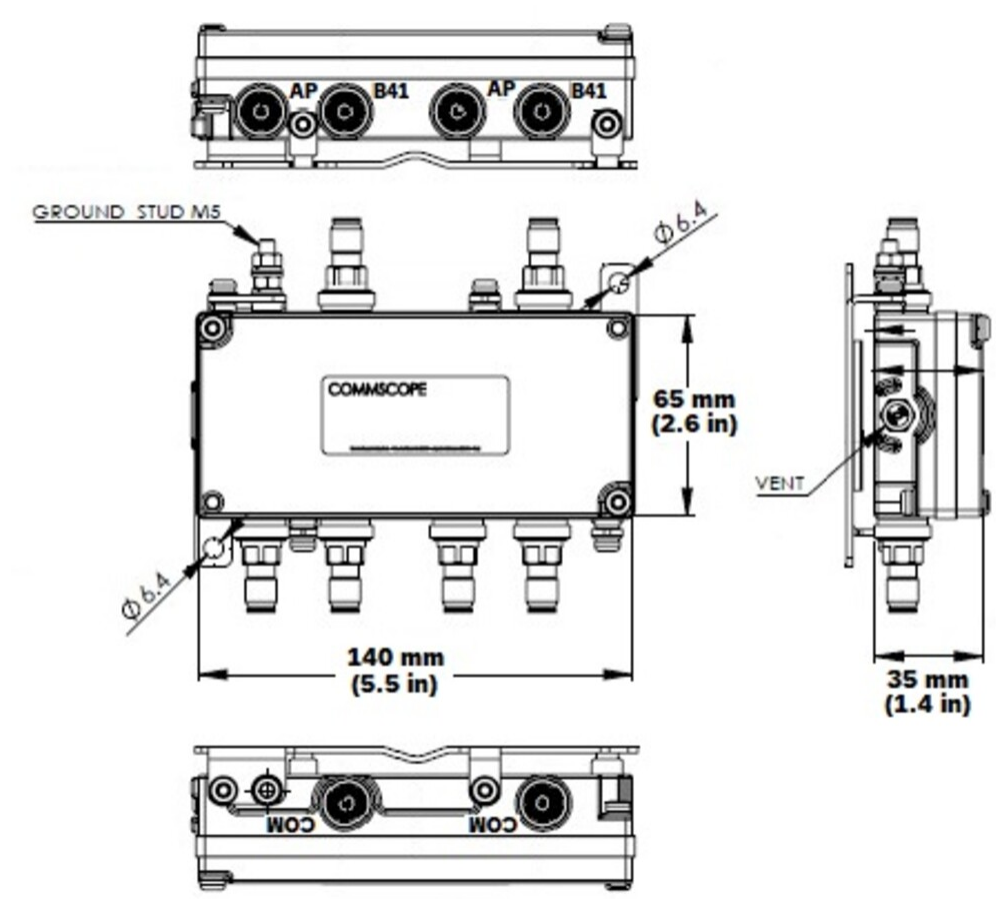

## Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	AWS 1700   AWS 2000   DCS 1800   IMT 2100   IMT 2600   PCS 1900   TDD 2600

## Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through Method	Factory set
dc/AISG Pass-through Path	Branch 1
dc/AISG Pass-through, combiner	Branch 1
dc/AISG Pass-through, demultiplexer	Branch 1
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform
Voltage	10–30 Vdc

# UDX1726T-N10 | E11F03P86

## Electrical Specifications, AISG

**AISG Carrier** 2.176 MHz ± 100 ppm


## Electrical Specifications

Sub-module	1   2	1   2
Branch	1	2
Port Designation	PCS-AWS	BRS (B41)
License Band	PCS 1900, Band Pass AWS 1700, Band Pass AWS 2000, Band Pass DCS 1800, Band Pass IMT 2100, Band Pass	TDD 2600, Band Pass IMT 2600, Band Pass

## Electrical Specifications, Band Pass

Frequency Range, MHz	1695–2200	2496–2700
Insertion Loss, typical, dB	0.1	0.15
Total Group Delay, maximum, ns	15	15
Return Loss, minimum, dB	20	20
Isolation, minimum, dB	35	35
Input Power, RMS, maximum, W	70	70
Input Power, PEP, maximum, W	1500	1500
3rd Order PIM, maximum, dBc	-161	-161
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers

## Block Diagram

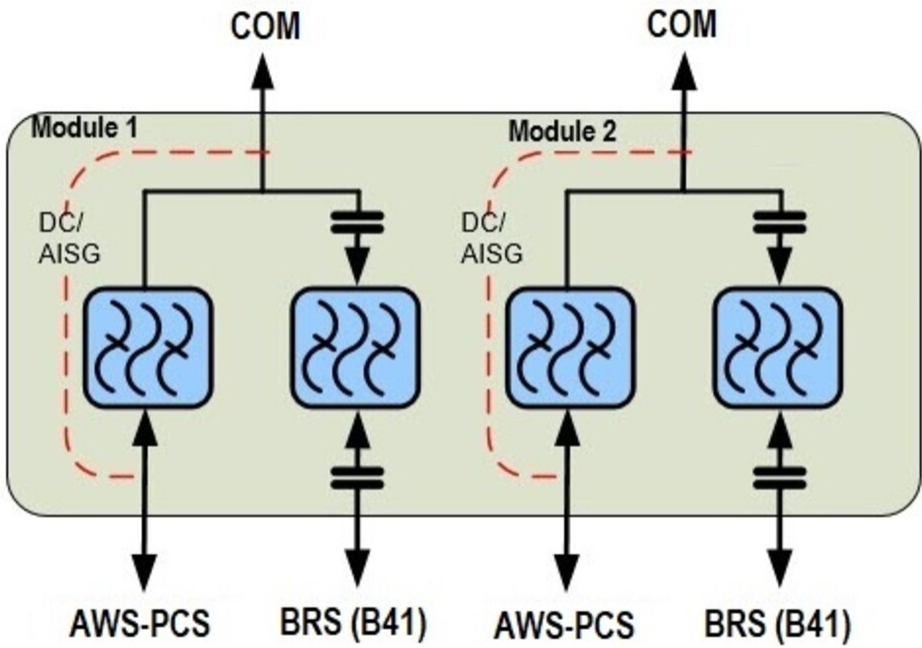

Material Specifications

Finish

Painted

Environmental Specifications

Operating Temperature

-40 °C to +65 °C (-40 °F to +149 °F)

Relative Humidity

Up to 100%

Ingress Protection Test Method

IEC 60529:2001, IP67

Packaging and Weights

Included

Mounting hardware

Mounting Hardware Weight

0.13 kg | 0.287 lb

Volume

0.32 L

Weight, without mounting hardware

0.72 kg | 1.587 lb