

NHHS4-45B-R3B



14 Port Sector Antenna, 2x 698-896 MHz, 4x 1695-2360 MHz 45° HPBW, and 8x 3400-3550/3700-4000 MHz Beamformer, 3x RETs and 3x SBTs

- Narrow beamwidth capacity antenna for higher level of densification and enhanced data throughput
- Internal SBT on low and high band allow remote RET control from the radio over the RF jumper cable
- Separate RS-485 RET input/output for low and high band
- One LB RET, one MB RET and one HB RET. Both mid bands are controlled by one RET to ensure same tilt level for 4x Rx or 4x MIMO

General Specifications

| | |
|----------------------------------|--|
| Antenna Type | Sector and beamforming |
| Band | Multiband |
| Calibration Connector Interface | 4.3-10 Female |
| Calibration Connector Quantity | 1 |
| Color | Light Gray (RAL 7035) |
| Grounding Type | RF connector inner conductor and body grounded to reflector and mounting bracket |
| Performance Note | Outdoor usage |
| Radome Material | Fiberglass, UV resistant |
| Radiator Material | Low loss circuit board |
| Reflector Material | Aluminum |
| RF Connector Interface | 4.3-10 Female |
| RF Connector Location | Bottom |
| RF Connector Quantity, high band | 8 |
| RF Connector Quantity, mid band | 4 |
| RF Connector Quantity, low band | 2 |
| RF Connector Quantity, total | 14 |

Remote Electrical Tilt (RET) Information

| | |
|---------------|-----------------------------------|
| RET Hardware | CommRET v2 |
| RET Interface | 8-pin DIN Female 8-pin DIN Male |


NHHS4-45B-R3B

| | |
|--|---|
| RET Interface, quantity | 3 female 3 male |
| Input Voltage | 10–30 Vdc |
| Internal Bias Tee | Cal Port Port 1 Port 3 |
| Internal RET | High band (1) Low band (1) Mid band (1) |
| Power Consumption, active state, maximum | 10 W |
| Power Consumption, idle state, maximum | 2 W |
| Protocol | 3GPP/AISG 2.0 |

Dimensions

| | |
|--------------------------|---------------------|
| Width | 498 mm 19.606 in |
| Depth | 197 mm 7.756 in |
| Length | 1828 mm 71.969 in |
| Net Weight, antenna only | 32.6 kg 71.871 lb |

Array Layout

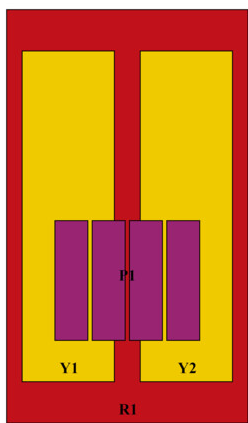


| Array ID | Frequency (MHz) | RF Connector | HPBW | RET (SRET) | AISG No. | RET UID |
|----------|-----------------|--------------|------|------------|----------|------------------|
| R1 | 698-896 | 1 - 2 | 45° | 1 | AISG1 | CPxxxxxxxxxxxxR1 |
| Y1 | 1695-2360 | 3 - 4 | 45° | 2 | AISG2 | CPxxxxxxxxxxxxY1 |
| Y2 | 1695-2360 | 5 - 6 | 45° | | | |
| P1 | 3400-4000 | 7 - 14 | BF° | 3 | AISG3 | CPxxxxxxxxxxxxP1 |

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

NHHS4-45B-R3B

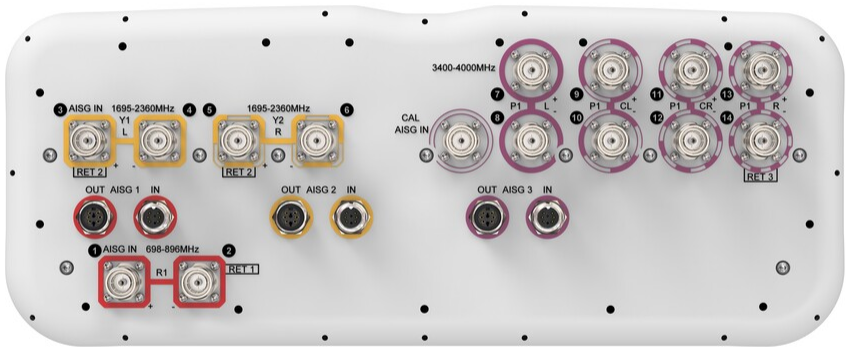

Electrical Specifications

| | |
|----------------------------|---|
| Impedance | 50 ohm |
| Operating Frequency Band | 1695 – 2360 MHz 3400 – 4000 MHz 698 – 896 MHz |
| Polarization | ±45° |
| Total Input Power, maximum | 1,040 W @ 50 °C |

Electrical Specifications

| | R1 | R1 | Y1,Y2 | Y1,Y2 | Y1,Y2 | Y1,Y2 | P1 | P1 |
|---------------------------------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|
| Frequency Band, MHz | 698–806 | 806–896 | 1695–1880 | 1850–1990 | 1920–2200 | 2300–2360 | 3400–3550 | 3700–4000 |
| RF Port | 1,2 | 1,2 | 3-6 | 3-6 | 3-6 | 3-6 | 7-14 | 7-14 |
| Gain, dBi | 16.9 | 17.3 | 18.9 | 19.3 | 20.2 | 20.4 | 16 | 17.5 |
| Beamwidth, Horizontal, degrees | 46 | 40 | 48 | 46 | 43 | 39 | 83 | 69 |
| Beamwidth, Vertical, degrees | 12.3 | 10.9 | 5.7 | 5.3 | 5 | 4.7 | 6.2 | 5.7 |
| Beam Tilt, degrees | 2–14 | 2–14 | 0–8 | 0–8 | 0–8 | 0–8 | 0–10 | 0–10 |
| USLS (First Lobe), dB | 19 | 16 | 17 | 18 | 19 | 21 | 14 | 14 |
| Front-to-Back Ratio at 180°, dB | 33 | 34 | 34 | 37 | 36 | 36 | 29 | 31 |

NHHS4-45B-R3B

| | | | | | | | | |
|---|------------|------------|------------|------------|------------|------------|------------|------------|
| Coupling level, Amp, Antenna port to Cal port, dB | | | | | | | 26 | 26 |
| Coupling level, max Amp Δ, Antenna port to Cal port, dB | | | | | | | ±2 | ±2 |
| Coupler, max Amp Δ, Antenna port to Cal port, dB | | | | | | | 0.9 | 0.9 |
| Coupler, max Phase Δ, Antenna port to Cal port, degrees | | | | | | | 7 | 7 |
| Isolation, Cross Polarization, dB | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Isolation, Inter-band, dB | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Isolation, Co-polarization, dB | | | | | | | 19 | 19 |
| VSWR Return loss, dB | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 | 1.5 14.0 |
| PIM, 3rd Order, 2 x 20 W, dBc | -153 | -153 | -153 | -153 | -153 | -153 | -145 | -145 |
| Input Power per Port at 50°C, maximum, watts | 300 | 300 | 250 | 250 | 250 | 250 | 75 | 75 |

Electrical Specifications, Broadcast 65°

| | | | | | | | | |
|---|--|--|--|--|--|--|-----------|-----------|
| Frequency Band, MHz | | | | | | | 3400–3550 | 3700–4000 |
| Gain, dBi | | | | | | | 17.1 | 18.5 |
| Beamwidth, Horizontal, degrees | | | | | | | 65 | 65 |
| Beamwidth, Vertical, degrees | | | | | | | 6.2 | 5.7 |
| Front-to-Back Total Power at 180° ± 30°, dB | | | | | | | 25 | 26 |
| USLS (First Lobe), dB | | | | | | | 16 | 18 |

Electrical Specifications, Broadcast 45°

| | | | | | | | | |
|---|--|--|--|--|--|--|-----------|-----------|
| Frequency Band, MHz | | | | | | | 3400–3550 | 3700–4000 |
| Beamwidth, Vertical, degrees | | | | | | | 6.2 | 5.7 |
| Front-to-Back Total Power at 180° ± 30°, dB | | | | | | | 26 | 27 |
| USLS (First Lobe), dB | | | | | | | 16 | 18 |

Electrical Specifications, Service Beam

| | | | | | | | | |
|-----------------------|--|--|--|--|--|--|-----------|-----------|
| Frequency Band, MHz | | | | | | | 3400–3550 | 3700–4000 |
| Steered 0° Gain, dBi | | | | | | | 20.4 | 21.7 |
| Steered 0° Beamwidth, | | | | | | | 27 | 22 |

NHHS4-45B-R3B

| | | |
|--|------|------|
| Horizontal, degrees | | |
| Steered 0° Front-to-Back | 29 | 29 |
| Total Power at 180° ± 30°, dB | | |
| Steered 0° Horizontal | 13 | 13 |
| Sidelobe, dB | | |
| Steered 0° USLS (First Lobe), dB | 17 | 18 |
| Steered 30° Gain, dBi | 19.5 | 19.9 |
| Steered 30° Beamwidth, Horizontal, degrees | 30 | 30 |
| Steered 30° Front-to-Back | 28 | 28 |
| Total Power at 180° ± 30°, dB | | |

Electrical Specifications, Soft Split

| | | |
|---|---------------------|------|
| Frequency Band, MHz | 3400–3550 3700–4000 | |
| Gain, dBi | 19.3 | 20.2 |
| Beamwidth, Horizontal, degrees | 35 | 32 |
| Front-to-Back Total Power at 180° ± 30°, dB | 27 | 29 |
| Horizontal Sidelobe, dB | 14 | 16 |
| USLS (First Lobe), dB | 17 | 18 |

Mechanical Specifications

| | |
|----------------------------------|---|
| Wind Loading @ Velocity, frontal | 622.0 N @ 150 km/h (139.8 lbf @ 150 km/h) |
| Wind Loading @ Velocity, lateral | 188.0 N @ 150 km/h (42.3 lbf @ 150 km/h) |
| Wind Loading @ Velocity, maximum | 746.0 N @ 150 km/h (167.7 lbf @ 150 km/h) |
| Wind Loading @ Velocity, rear | 428.0 N @ 150 km/h (96.2 lbf @ 150 km/h) |
| Wind Speed, maximum | 241 km/h (150 mph) |

Packaging and Weights

| | |
|----------------|----------------------|
| Width, packed | 565 mm 22.244 in |
| Depth, packed | 309 mm 12.165 in |
| Length, packed | 2015 mm 79.331 in |
| Weight, gross | 46.1 kg 101.633 lb |

Regulatory Compliance/Certifications

| | |
|--------|----------------|
| Agency | Classification |
|--------|----------------|

NHHS4-45B-R3B

| | |
|------------|-----------------------------------|
| CHINA-ROHS | Above maximum concentration value |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



Included Products

| | | |
|----------|---|--|
| BSAMNT-3 | – | Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set. |
|----------|---|--|

* Footnotes

| | |
|-------------------------|---|
| Performance Note | Severe environmental conditions may degrade optimum performance |
|-------------------------|---|