


PM-SU2-B



Universal Sliding Pipe Mount Base Kit for 2-3/8 in OD pipe

Product Classification

Product Type Pipe mount

General Specifications


Mounting	Angle 60°, 203.2 mm (8 in) Angle 90°, 152.4 mm (6 in) Straight or tapered legs up to 203.2 mm (8 in) OD
Note	One 96 in x 8 in panel antenna per sector
Pipe, quantity	0
Tower Taper	Tapered

Dimensions

Height	127 mm 5 in
Width	304.8 mm 12 in
Length	304.8 mm 12 in
Mounting Diameter, maximum	203.2 mm 8 in
Mounting Diameter, minimum	0 mm 0 in
Pipe Outer Diameter	60.96 mm 2.4 in

PM-SU2-B

Outline Drawing

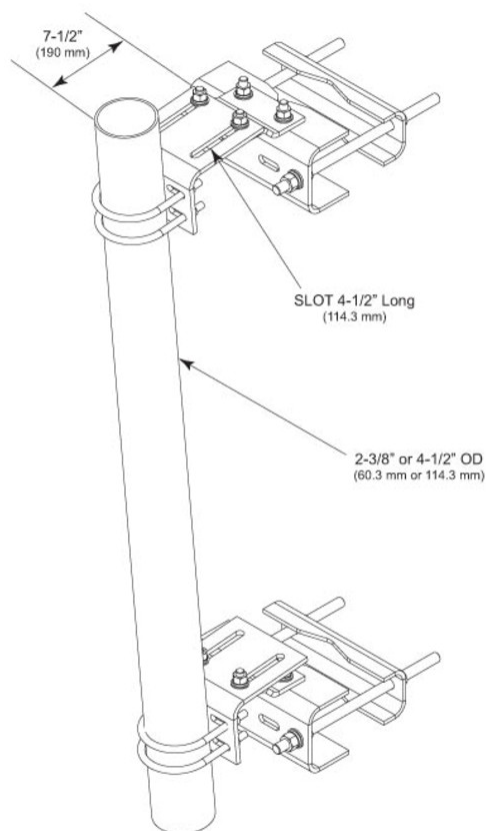

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 120 mph (BWS) at 150 ft AGL

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

Included Sliding pipe mount brackets | Universal saddle mount

Packaging quantity 2

PM-SU2-B

Weight, net 36.3 kg | 80.028 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

PM-SL2	– Universal Taper Pipe Mount Slider Bracket for 2-3/8 in OD pipe
SM-U2080	– Universal Saddle Mount for straight or tapered legs up to 8 in OD, 8 in angle 60°, or 6 in angle 90° (Kit of 2)

* Footnotes

Wind Rating	BWS—Base Wind Speed; FBC—Florida Building Code
--------------------	--