#### Base Product



0.9 m | 3 ft Sentinel® High Performance Antenna, dual-polarized, 17.700 - 19.700 GHz

#### **OBSOLETE**

This product was discontinued on: June 11, 2021

Replaced By:

SHPX3-18/B 0.9m | 3 ft Sentinel® High Performance Antenna, dual-polarized, 17.700 - 19.700 GHz

#### **Product Classification**

Product Type Microwave antenna

Product Brand Sentinel®

General Specifications

Antenna Type SHPX - Sentinel® High Performance Antenna, dual-

polarized

43.7 dBi

**Polarization** Dual

Side Struts, Included 0

Side Struts, Optional

**Dimensions** 

Gain, Top Band

**Diameter, nominal** 0.9 m | 3 ft

**Electrical Specifications** 

Operating Frequency Band 17.700 – 19.700 GHz

Gain, Low Band 42.7 dBi

**Gain, Mid Band** 43.5 dBi

Boresite Cross Polarization Discrimination (XPD) 30 dB

Front-to-Back Ratio 74 dB

Beamwidth, Horizontal 1.1 °



Page 1 of 6

Return Loss 17.7 dB

**VSWR** 1.3

Radiation Pattern Envelope Reference (RPE) 7300A

Electrical Compliance Brazil Anatel Class 2 | Canada SRSP 317.8 Part

A | ETSI 302 217 Class 4 | US FCC Part 101A

Cross Polarization Discrimination (XPD) Electrical Compliance ETSI EN 302217 XPD Category 2

Mechanical Specifications

**Compatible Mounting Pipe Diameter** 90 mm – 120 mm | 3.5 in – 4.7 in


Fine Azimuth Adjustment Range ±15°
Fine Elevation Adjustment Range ±15°

 Wind Speed, operational
 201 km/h | 124.896 mph

 Wind Speed, survival
 250 km/h | 155.343 mph



## Antenna Dimensions and Mounting Information

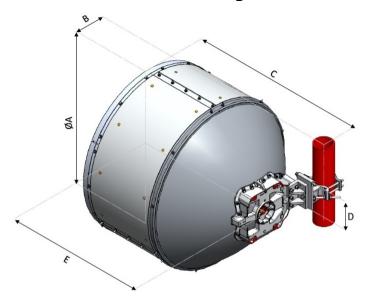

Dimensions in inches (mm)					
Antenna Size, ft (m)	А	В	С	D	E
3 (0.9)	38.9 (987)	16 (407)	36.3 (923)	7.2 (183)	34.7 (882.2)

### Wind Forces at Wind Velocity Survival Rating

**Axial Force (FA)** 

Angle α for MT Max

Side Force (FS)

**Twisting Moment (MT)** 

Zcg without Ice

Zcg with 1/2 in (12 mm) Radial Ice

Weight with 1/2 in (12 mm) Radial Ice

2956 N | 664.535 lbf

40°

1464 N | 329.12 lbf

1203 N-m | 10,647.447 in lb


325 mm | 12.795 in

481 mm | 18.937 in

89 kg | 196.211 lb



## Wind Forces at Wind Velocity Survival Rating Image

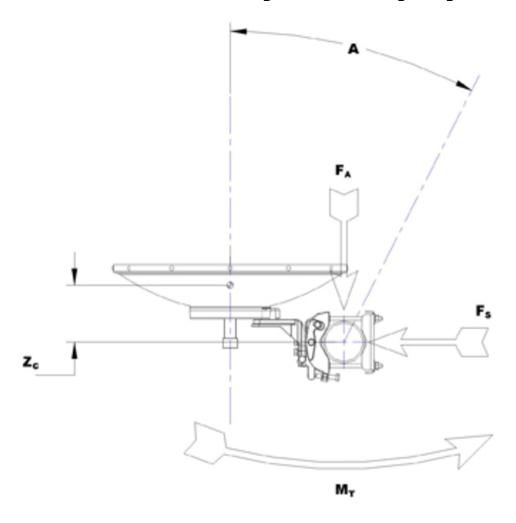

#### Packaging and Weights

**Weight, net** 27 kg | 59.525 lb

## Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

#### \* Footnotes

**Operating Frequency Band** 

Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.



Page 4 of 6

**Gain, Mid Band**For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the

measured antenna patterns.

**Boresite Cross Polarization Discrimination (XPD)**The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Front-to-Back Ratio

Denotes highest radiation relative to the main beam, at 180°

±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

**Return Loss** The figure that indicates the proportion of radio waves

incident upon the antenna that are rejected as a ratio of

those that are accepted.

**VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-

Ratio within the operating band.

Radiation Pattern Envelope Reference (RPE)

Radiation patterns define an antenna's ability to discriminate

against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular

accuracy of +/-1° throughout

Cross Polarization Discrimination (XPD) Electrical Compliance

The difference between the peak of the co-polarized main hear and the maximum cross-polarized signal over an angle

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Wind Speed, operational For VHLP(X), SHP(X), HX and USX antennas, the wind speed

where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined

as a deflection is equal to or less than 0.1 degrees.

Wind Speed, survival

The maximum wind speed the antenna, including mounts

and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified

amount of radial ice.

**Axial Force (FA)**Maximum forces exerted on a supporting structure as a

result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the

mounting pipe.

Side Force (FS)

Maximum side force exerted on the mounting pipe as a

result of wind from the most critical direction for this

ANDREW®
an Amphenol company

**Twisting Moment (MT)** 

parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.