#### Base Product



0.6m | 2 ft ValuLine® High Performance Antenna, dual polarized, 31.000 – 33.400 GHz

#### Product Classification

Product Type	Microwave antenna
Product Brand	ValuLine®
General Specifications	
Antenna Type	VHLPX - ValuLine® High Performance Low Profile Antenna, dual- polarized
Polarization	Dual
Side Struts, Included	0
Side Struts, Optional	0
Dimensions	
Diameter, nominal	0.6 m   2 ft
Electrical Specifications	
Operating Frequency Band	31.000 – 33.400 GHz
Gain, Low Band	43.3 dBi
Gain, Mid Band	43.6 dBi
Gain, Top Band	44 dBi
Boresite Cross Polarization Discrimination (XPD)	30 dB
Front-to-Back Ratio	63 dB
Beamwidth, Horizontal	1.1 °
Beamwidth, Vertical	1.1 °
Return Loss	17.7 dB
VSWR	1.3
Radiation Pattern Envelope Reference (RPE)	7220C
Electrical Compliance	Brazil Anatel Class 2   Canada SRSP 331.8   ETSI 302 217 Class 3B






### Mechanical Specifications

Compatible Mounting Pipe Diameter	48 mm-120 mm   1.9 in-4.7 in
Fine Azimuth Adjustment Range	±15°
Fine Elevation Adjustment Range	±15°
Wind Speed, operational	201 km/h   124.896 mph
Wind Speed, survival	252 km/h   156.585 mph

## Antenna Dimensions and Mounting Information

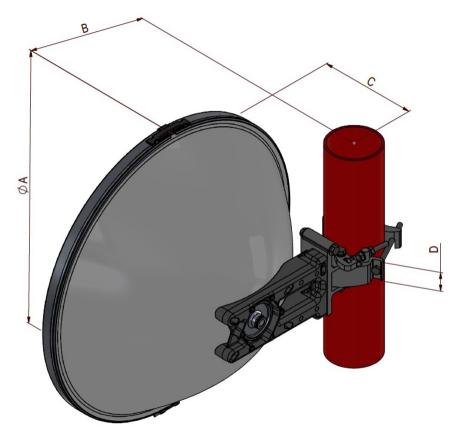

	Dir	mensions in Inches (m	ım)	
Antenna Size, ft (m)	A	B	С	D
2 (0.6)	25.9 (660)	12.2 (310)	8.9 (228)	1.8 (45)

#### Wind Forces at Wind Velocity Survival Rating

Axial Force (FA)

1400 N | 314.733 lbf


Page 2 of 4



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

Angle $\alpha$ for MT Max	-50 °
Side Force (FS)	-350 N   -78.683 lbf
Twisting Moment (MT)	500 N-m   4,425.373 in lb
Zcg without Ice	55 mm   2.165 in
Zcg with 1 in (25 mm) Radial Ice	91 mm   3.583 in
Weight with 1 in (25 mm) Radial Ice	20 kg   44.092 lb

## Wind Forces at Wind Velocity Survival Rating Image

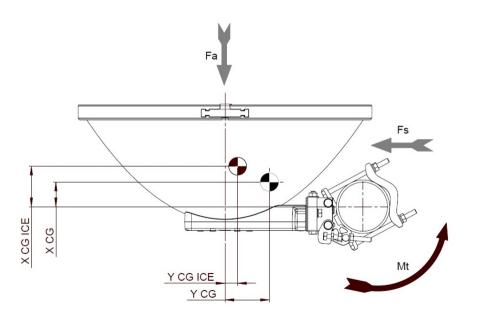

### Packaging and Weights

#### Weight, net

6.7 kg | 14.771 lb

### Regulatory Compliance/Certifications

Agency	Classification	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system	
* Footnotes		
Operating Frequency Ba	ind	Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.
Gain, Mid Band		For a given frequency band, gain is primarily a function of antenna size.

Page 3 of 4



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

	The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.
Boresite Cross Polarization Discrimination (XPD)	The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.
Front-to-Back Ratio	Denotes highest radiation relative to the main beam, at $180^{\circ} \pm 40^{\circ}$ , across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.
Return Loss	The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.
VSWR	Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band.
Radiation Pattern Envelope Reference (RPE)	Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout
Wind Speed, operational	For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is $0.3 \times 10^{-3}$ km s dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees.
Wind Speed, survival	The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.
Axial Force (FA)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Side Force (FS)	Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

Page 4 of 4